



	MIN.	MAX.
A	1.60"	2.40"
B	0.65"	—
C	0.45"	0.90"
D	0.9"	1.40"
E	0.2"	0.2"

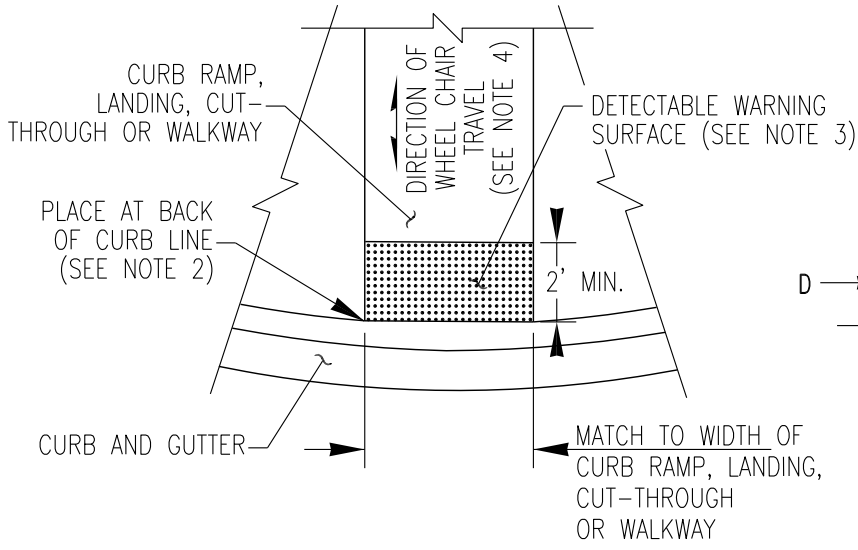

**NOTES:**

1. THE DETECTABLE WARNING SURFACE SHALL EXTEND THE FULL WIDTH OF THE CURB RAMP (EXCLUSIVE OF FLARES) OR THE LANDING.
2. THE EDGE OF THE DETECTABLE WARNING SURFACE SHALL BE PLACED AT THE BACK OF THE CURB. CURB SHALL BE FORMED TO PROVIDE A STRAIGHT LINE ALONG THE BACK OF CURB ADJACENT TO THE WARNING PATTERN.
3. THE ROWS OF TRUNCATED DOMES SHALL BE ALIGNED TO BE PERPENDICULAR TO THE GRADE BREAK AT THE BACK OF CURB.
4. THE ROWS OF TRUNCATED DOMES SHALL BE ALIGNED TO BE PARALLEL TO THE DIRECTION OF TRAVEL.
5. SEE STANDARD PLANS FOR SIDEWALK AND CURB RAMP DETAILS.
6. IF CURB AND GUTTER ARE NOT PRESENT, SUCH AS A SHARED-USE PATH CONNECTION, THE DETECTABLE WARNING SURFACE SHALL BE PLACED AT THE PAVEMENT EDGE.

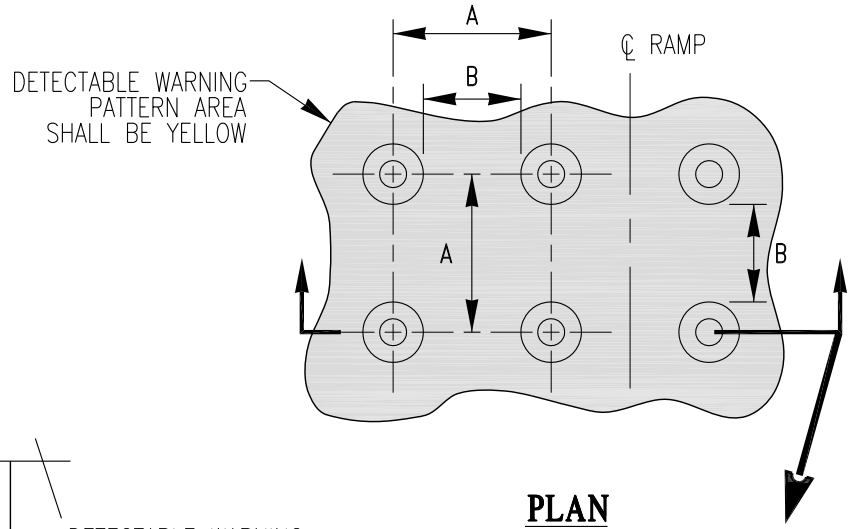

# DETECTABLE WARNING SURFACE

PUBLIC WORKS ENGINEERING	
APPR. BY: PKR	DATE: 01.16
DRAWN BY: LD	DWG: ST21
CAD FILE: 2013_ST21_01_2016	